

Multi Mono **Specialised**



*Module images for representation purpose only

Solar PV Module DESERV Prime HVM





Prime 275 Wp - 280 Wp: 63 V

The ideal PV Module for all applications that use the highest quality of PV Cells, in-house Encapsulants, and Backsheets.

Prime Series Modules are specially designed high voltage PV Modules with Multi Crystalline Silicon Cells.






SAFE

-  IP67 Junction box
-  10 years of product warranty
-  25 Years of limited power output warranty
-  1000 Vdc







RELIABLE

-  Extreme weather resilience
-  Windspeed - 2400 Pa, Snowload - 5400 Pa
-  Highly reliable anti-reflective coated glass



HIGH PERFORMANCE

-  PID resistant
-  Superlative performance in low light
-  High power density
-  Positive power tolerance

Ideal for:



Residential



Commercial



Utility



Off-grid

Certifications:

- IEC Compliant
- Independently audited by SOLARBUYER
- IMS Certified Company - ISO 9001: 2015 & OHSAS 45001: 2018
- EMS - ISO 14001: 2015



RenewSys is the first integrated manufacturer of Solar PV Modules and its key components- Encapsulants (EVA and POE), Backsheets and Solar PV Cells. We have a global presence with offices in India, Mauritius, Nigeria, South Africa, Singapore, UAE, China, representatives in Brazil, Europe, USA, Mexico, and an evolving distributor network.

Corporate Office

Unit No. 607, 6th Floor, Trade Center, Bandra-Kurla Complex, Bandra East, Mumbai - 400 051, Maharashtra, India

Factory

Plot No.6, Survey # 114/P, Srinagar Village, Maheshwaram Mandal, Dist - Rangareddy, Hyderabad - 501 359, Telangana, India

- Please refer to the installation manual for detailed information.

Performance under standard test conditions (1000w/m², AM 1.5, 25 °C)

	Prime	
DESERV (Wp)	275	280
Rated power (Pmax), Wp	275	280
Max. power voltage (Vmp), V	63.44	63.55
Max. power current (Imp), A	04.34	04.41
Open circuit voltage (Voc), V	76.45	76.50
Short circuit current (Isc), A	04.68	04.75
Module efficiency (%)	16.49	16.78
NOCT (Wp) at 45 ± 2 °C @800 W/m²	275	280
Pmax (W)	204.66	208.38
Max. power voltage (Vmp), V	58.02	58.12
Max. power current (Imp), A	03.53	03.58
Open circuit voltage (Voc), V	71.08	71.13
Short circuit current (Isc), A	03.82	03.85

Mechanical Characteristics	Prime
Cable	No. 12 AWG, 4mm ²
PV Connectors	MC4 Connectors / MC4 Compatible
Frame	Anodized Aluminum Alloy
Junction box	Prime: IP67 Split Junction box
Glass	3.2mm Thick low iron tempered


Operating Conditions	Prime
Ambient temperature, °C	-40 to +85
Max. system voltage, Vdc	1000
Hail impact velocity, m/sec	23
Max. surface load capacity, Pa	5400
Max. wind speed capacity, Pa	2400

Cell Temperature Coefficient	Prime
Open circuit voltage	-0.30 % / °C
Short circuit current	+0.05 % / °C
Nominal power	-0.40 % / °C

Physical Parameters	Prime
No. of cells	120
Module dimension (mm)	1025 X 1627 (± 2)
Module thickness (mm)	40 or 35
Approximate weight (kg)	18.5 or 18.2

Packaging Configuration	Prime
No. of Modules/pallet	27 or 29

Module Dimension Diagrams (mm)

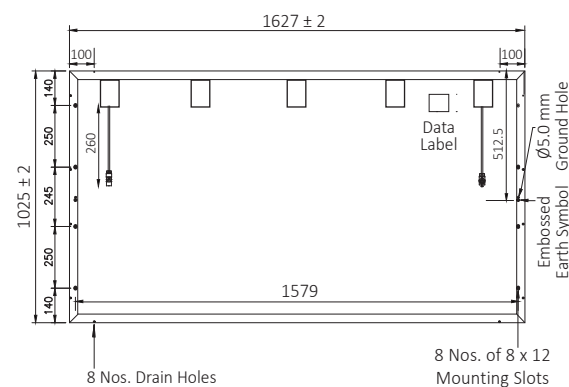

*Cable length may vary based on requirements

*Due to continuous product updation, specifications may change without notice. Kindly refer to the website for latest information: www.renewsysworld.com